

2017

TUNDRA™ XTREME

PACKAGE HIGHLIGHTS

- **Lightweight, low profile REV-XM™ seat with 3L / 0.8 us gal of storage**
- REV-XM™ running boards (large opening)
- REV-XU™ platform
- SC™-5U articulating rear suspension
- Locking mechanism on one side (no tool required) for articulated suspension
- 16 × 154 × 2.5 in. ProLite track
- Lynx Telescopic front suspension
- Brembo brake with braided stainless-steel brake line
- Forward steering position
- RF D.E.S.S.™ key
- HPG™ rear and center shocks
- LinQ™ attach kit (4)



TUNDRA™ Xtreme 600HO shown

ROTAX® ENGINE

600 H.O. E-TEC®

Engine details	Liquid-cooled, 3-D R.A.V.E.™
Cylinders	2
Displacement	594.4 cc / 36.3 in. ³
Bore	72 mm / 2.8 in.
Stroke	73 mm / 2.9 in.
Maximum engine speed	8100 RPM
Carburation	Electronic Direct Injection
Recommended fuel type	Premium unleaded
Minimum octane	91
Fuel tank	40 liters / 10.6 gallons
Oil tank capacity	3.7 liters / 3.9 quarts

POWERTRAIN

Drive clutch type	TRA™ III
Driven clutch type	QRS
Engagement	2800 RPM
Small sprocket number of teeth	19
Large sprocket number of teeth	49
Drive sprocket number of teeth	8
Drive sprocket diameter	183 mm / 7.2 in.
Brake system	Brembo brake with braided stainless-steel brake line

DRY WEIGHT

225 kg / 495 lb

FEATURES

Frame	REV-XU™	Reverse	RER™	Mirrors	Optional
Skis	Pilot™ DS 2	Heated throttle lever	Standard	Windshield	254 mm / 10 in.
Seating	REV-XM™ lightweight with storage	Heated grips	Standard	Runner	Square 5/16
Handlebar	Aluminum with J-hooks / Grab handle	Gauge	Analog with display	Carbide configuration	102 mm / 4 in. at 90°
Riser block height	205 mm / 8 in.	Electric start	Standard	Hitch	Optional

COLOUR

White / Manta Green 

DIMENSIONS

Vehicle overall length	3329 mm / 131.6 in.
Vehicle overall width	1002 mm / 39.4 in.
Vehicle overall height	1296 mm / 51.0 in.
Ski stance	813 mm / 32 in.
Ski overall length	1040 mm / 41 in.
Track nominal width	406 mm / 16 in.
Track nominal length	3923 mm / 154 in.
Track profile height	63.5 mm / 2.5 in. ProLite

SUSPENSION

Front suspension	LTS
Front shock	Motion Control
Front suspension max. travel	150 mm / 6 in.
Rear suspension	SC™-5U
Center shock	HPG™
Rear shock	HPG™
Rear suspension max. travel	239 mm / 9.4 in.



TUNDRA™ Xtreme 600HO shown




TUNDRA™ Xtreme 600HO shown

FEATURE HIGHLIGHTS



LinQ™ cargo system included

Our cargo attachment system is the hassle-free way to connect cargo bags or a fuel caddy to your sled in seconds.

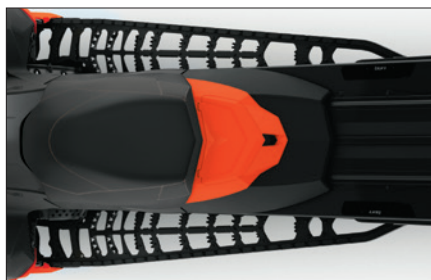


Running boards with large opening

Footings is solid with running board snow evacuation holes increased by 87% over the REV-XP™. The running board edge extrusion – with aggressive boot grips – is three times stronger than the REV-XP™.



Handlebar control

Redesigned to be more intuitive. Warmer switches oriented to up / down operation.

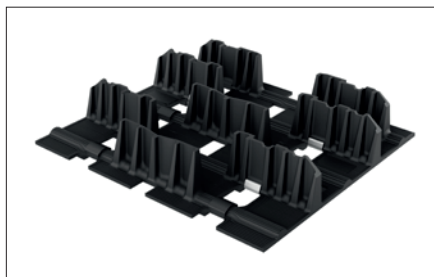

ProLite track 16 × 154 × 2.5 in.

New design, including taller lugs, significantly improves acceleration and deep snow performance.



Analog gauge with display

GAUGE FEATURES

Speedometer	Standard
Tachometer	Standard
Fuel	Standard
Engine temperature	Optional